




KST / KSTM

# CIRCUIT DIAGRAM

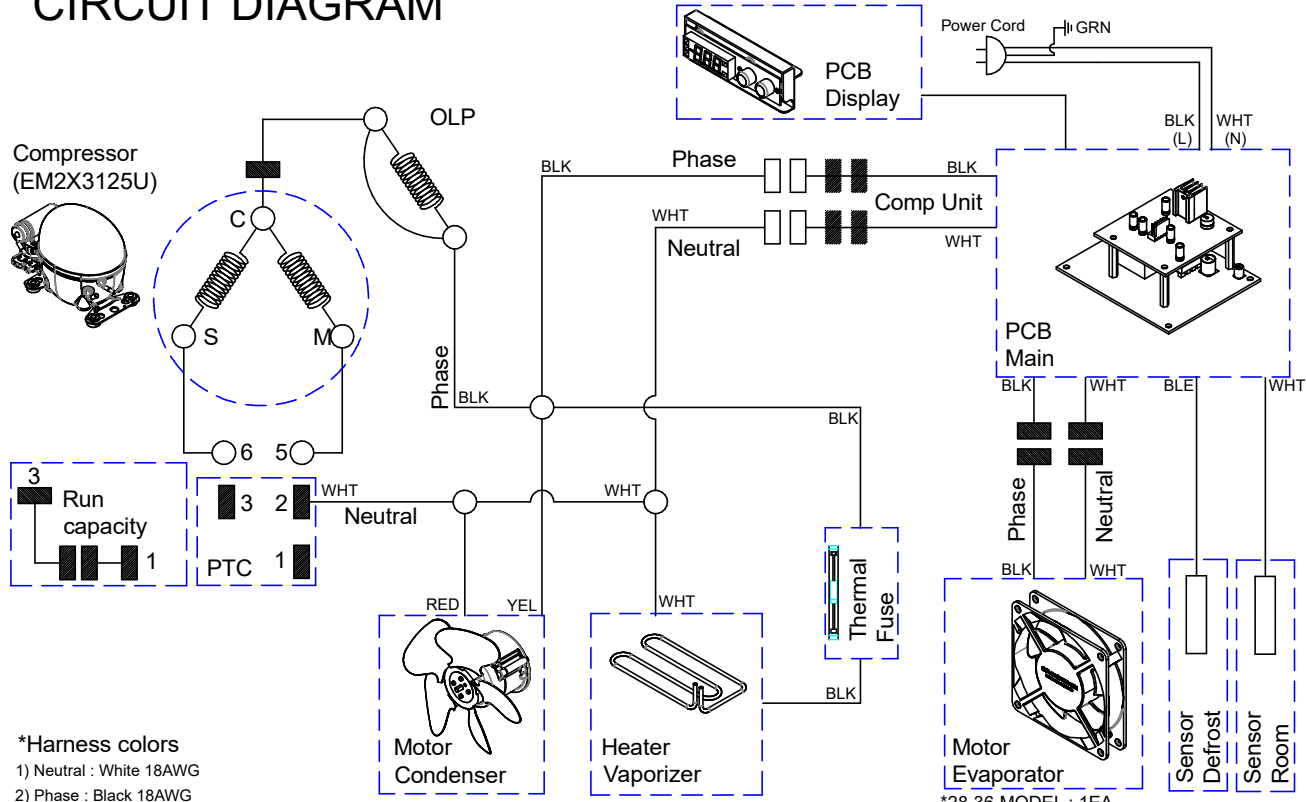


**\*Harness colors**  
 1) Neutral : White 18AWG  
 2) Phase : Black 18AWG  
 3) Sensor Room : White 24AWG  
 4) Sensor Defrost : Blue 24AWG

WHT - WHITE    BLE - BLUE  
 BLK - BLACK    GRN - GREEN  
 RED - RED      YEL - YELLOW

(115V/60Hz)

\*28R, 36R, 48R, 60R, 72R-HC      \*28S-D2-HC, 48S-D4-HC,  
 \*28S, 36S, 48S, 60S, 72S-HC      60S-D4-HC, 72S-D6-HC  
 \*28M, 36M, 48M, 60M, 72M-HC      \*28M-D2-HC, 48M-D4-HC,  
 \*28R-D2-HC, 48R-D4-HC,              60M-D4-HC, 72M-D6-HC  
 60R-D4-HC, 72R-D6-HC

# PCB LAYOUT

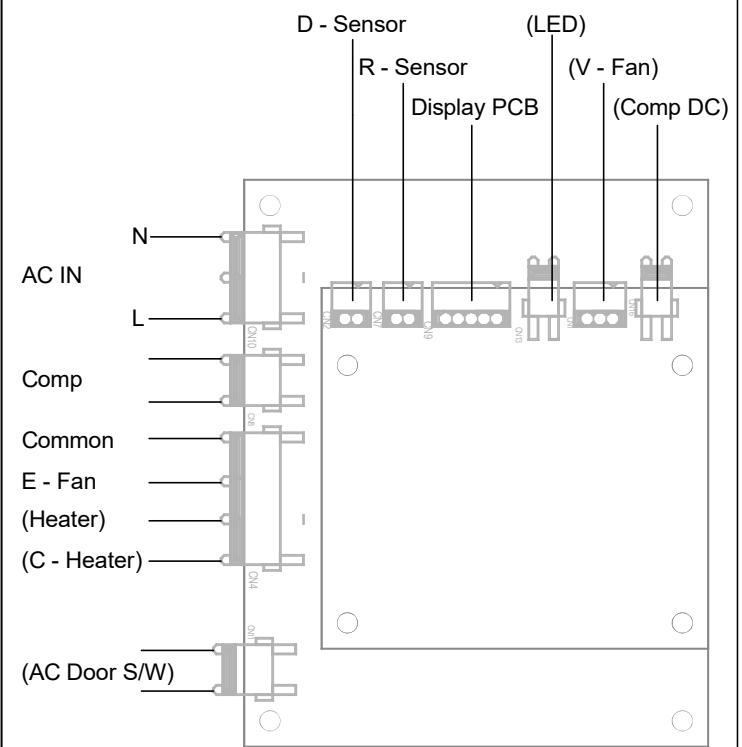

"CODE NO"

