

Durable Design

- Stainless steel interior & exterior
- 3 height adjustable, heavy duty, PE coated wire shelves
- LED interior lighting
- Digital temperature display
- Door lock with keys
- Simple plug-in installation
- Oversized bottom mount compressor section

Superior Quality

- Self-closing door with stay open feature
- Seals tight with magnetic vinyl gasket
- Open door alert beeps when door has been open for 3 minutes.
- Foamed-in place high-density polyurethane insulated body, CFC-free
- Large evaporator & condenser for quick cooling and greater efficiency
- Bottom mount compressor provides energy savings and ease of service.

Energy Efficient

- Designed for mobility, reliability & efficiency in commercial kitchens
- Certified with ETL & Energy Star guaranteeing quality standards and energy efficiency
- 4" swivel castors with 2 front brakes
- Easy grip handle
- Entirely self-contained system
- Automatic defrost system
- Digitally controlled temperature system
- Accommodates full-size bun sheet pans
- Easily adjustable shelf height
- Internal storage capacity is 20.5 cu. ft.
- NEMA 5-15 plug
- Compressor : Refrigerator - 1/3 HP / Freezer - 1/3 HP
- Holding temperature : Refrigerator 33°F to 39°F / Freezer 5°F to -9.4°F




**Single Door Series
Refrigerator / Freezer
Bottom Mount Compressor
KBSR-1 / KBSF-1**



Project Name:	
Location:	
Item:	Qty:
Model:	



TECHNICAL DRAWINGS KBSF-1 & KBSR-1

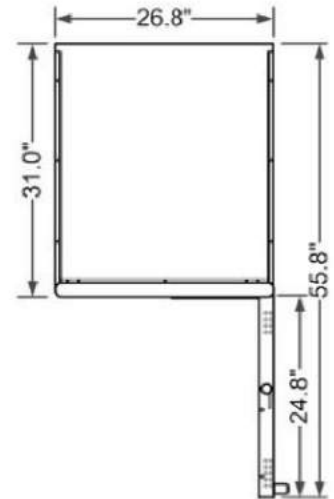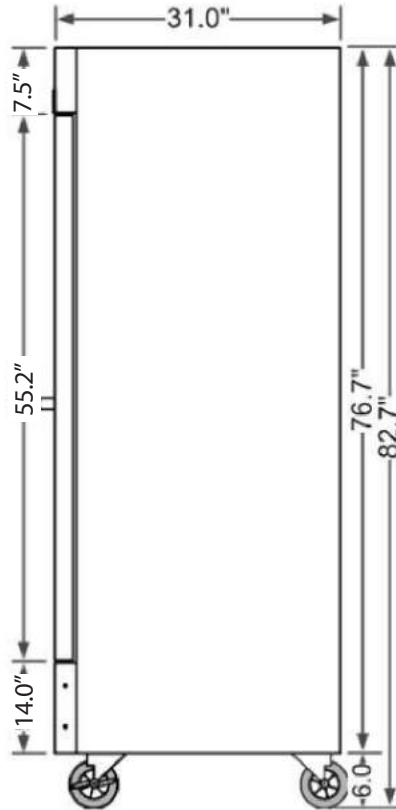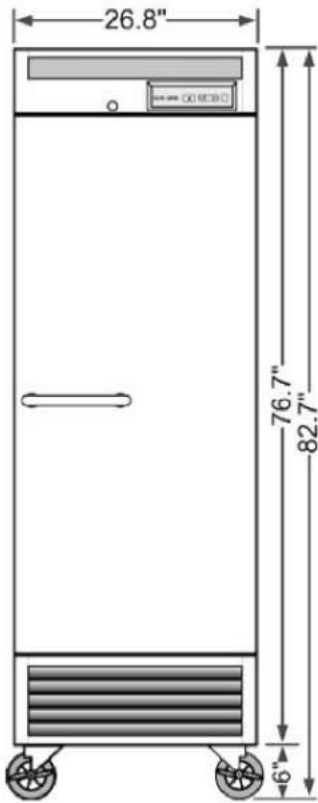

MODEL NUMBER	DESCRIPTION	INTERIOR / EXTERIOR MATERIALS	NUMBER OF DOORS	NUMBER OF SHELVES	CAPACITY (CUBIC FEET)	EXTERNAL DIMENSIONS (WxDxH in.) w/ handle	COMPRESSOR SIZE	VOLTAGE / FREQUENCY	AMPS	WORKING TEMP.	REFRIGERANT	SHIP WEIGHT (lbs.)
KBSR-1	Bottom Mount Single Door Refrigerator	Stainless Steel	1	3	20.5	26.8 x 32.75 x 82.7	1/3	115 V 60 Hz	6.0	33°F to 39°F	R134a	315
KBSF-1	Bottom Mount Single Door Freezer	Stainless Steel	1	3	20.5	26.8 x 32.75 x 82.7	1/3	115 V / 60 Hz	6.0	5°F to -9.4°F	R134a	328

These units are designed for maximum performance in an air-conditioned area of 75°F ambient temperature and 55% relative humidity. There must be adequate ventilation at the top, sides & rear of the unit for proper operation.



Warranty: 36 months parts & labor. Additional 24 months on compressor (parts only)

KOOL-IT is a registered trademark of MVP Group. Specifications subject to change without notice.



Tel: 786.600.4687 / Toll Free: 844.218.8477
Fax: 786.661.4100



Tel: 514.737.9701 / Toll Free: 888.275.4538
Fax: 514.342.3854 / Toll Free: 877.453.8832



sales@mvpgroupcorp.com / mvpgroupcorp.com