



# KUCR-60-2

## DOUBLE DOOR UNDERCOUNTER REFRIGERATOR

All-stainless steel construction, heavy-duty refrigeration system that delivers reliable and efficient cold storage with superior quality.



### KEY FEATURES



**• Eco-Friendly Refrigerant**  
Environmentally friendly R290 hydrocarbon refrigerant has low Global Warming Potential (GWP). Meets all USA, California & Canada refrigerant & energy standards.



**• Digital Control**  
Digital temperature controls and display with automatic defrost system.



**• High Power Reliable Refrigeration System**  
Fast pull down, optimal internal air circulation and reliable refrigeration, maintaining cooler temperatures for food preservation.



**• Durable, Self-contained System**  
Stainless steel exterior and interior, coated evaporator coil and oversized bottom mount compressor



*Signature* **40/80 Warranty**  
40 months parts and labor  
80 months on compressor (part only)



3560 NW 56th Street  
Fort Lauderdale, FL, United States 33309  
Telephone: 786.600.4687 / Toll Free: 844.218.8477  
Fax: 786.661.4100


5659 Royalmount Ave.  
Montreal, QC, Canada H4P 2P9  
Telephone: 514.737.9701 / Toll Free: 888.275.4538  
Fax: 514.342.3854 / Toll Free: 877.453.8832  
sales@mvpgroupcorp.com / mvpgroupcorp.com



# KUCR-60-2

## DOUBLE DOOR UNDERCOUNTER REFRIGERATOR

### PRODUCT VIEWS

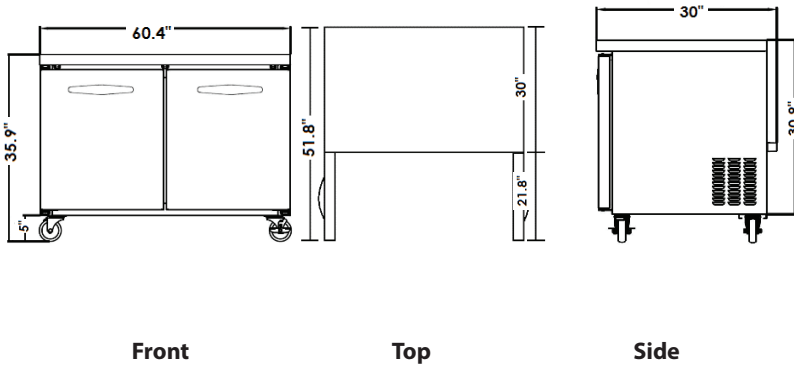

### TECHNICAL SPECIFICATIONS

Exterior Dimensions		Interior Dimensions	
W:	60.4" (1534 mm)	W:	55.3" (1405 mm)
D:	30" (762 mm)	D:	20.1" (511 mm)
H:	35.9" (912 mm)	H:	26.5" (673 mm)
<b>Interior Capacity</b>			
16.7 Cu Ft 473 L			
Doors	Material	Shelves	
2	Stainless Steel	4	
<b>Exterior Material</b>		Stainless Steel	
<b>Interior Material</b>		Stainless Steel	

### ADDITIONAL FEATURES



Heavy-duty 5" castors (2 with brakes)



Self-closing doors



Foamed-in-place high-density CFC-free polyurethane insulation



Tight-sealing magnetic vinyl gaskets

### REFRIGERATION PERFORMANCE

<b>Refrigerant</b>	R290
<b>Compressor Power</b>	1/4 HP
<b>Thermostat default setting</b>	33°F (0.5°C) to 40°F (4°C)

### ELECTRICAL

<b>Power Supply</b>	115V/60Hz	<b>Amps</b>	4.7A
<b>Plug Type</b>			
NEMA 5-15P			

### LOGISTICS

Unit Weight	Shipping Dimensions	
236 lb (107 kg)	W:	61.8" (1570 mm)
<b>Shipping Weight</b>	D:	34.1" (866 mm)
	H:	36.6" (930 mm)
287 lb (130 kg)		