BOTTLE
COOLERS

Features

- CFC free refrigerant and foam insulation
- Electronic thermostat and digital LED temperature display for accurate control and easy reading
- Easy to mount 1" wheels are standard with all units
- Stainless steel interior and exterior construction
- Forced-air cooling
- Doors have lock and key
- Adjustable dividers included, Self-defrosting evaporator
- Bottle cap opener & cap catcher standard
- Top: stainless steel
- Interior: stainless steel
- Exterior: stainless steel
- R-290 Natural refrigerant Model IBC-95SS
- R-600A Natural refrigerant Models IBC-36SS IBC-49SS IBC-65SS
- Temperature: 33 to 41°F / 0.5 to 4°C
- Electrical: 115/60/1 with NEMA 5-15P plug, 10ft cord
- IBC-36SS holds: 14.5 x 12 oz. cans or 11 x 12 oz. bottles
  IBC-49SS holds: 22.0 x 12 oz. cans or 18 x 12 oz. bottles
  IBC-65SS holds: 32.5 x 12 oz. cans or 22 x 12 oz. bottles
  IBC-95SS holds: 55.5 x 12 oz. cans or 38 x 12 oz. bottles

NEMA 5-15P

IBC-36SS

IBC-49SS

IBC-65SS

IBC-95SS

Specifications

DESIGNED TO OPERATE IN AMBIENT TEMPERATURES BETWEEN 40F-90F FOR OPTIMUM PERFORMANCE.

Model	Doors	Ext. Dimensions W X D X H (In)	Int. Dimensions W X D X H (In)	CU. FT.	Amps	H.P	Ship Weight
IBC-36SS	1	36.8 x 27 x 35	32.7 x 23 x 28.5	10	1.8	3/8	249 lbs
IBC-49SS	2	49.4 x 27 x 35	45.5 x 23 x 28.5	13.5	3	1/2	309 lbs
IBC-65SS	2	64.3 x 27 x 35	60.2 x 23 x 28.5	17.2	3	1/2	353 lbs
IBC-95SS	3	95.3 x 27 x 35	91.1 x 23 x 28.5	26	3	1/2	439 lbs

BOTTLE
COOLERS

Intertek Intertek

Dimensions in inches (mm)

IBC-36SS

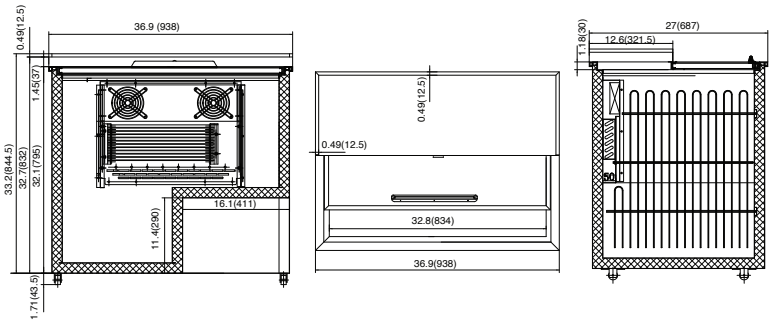

IBC-49SS

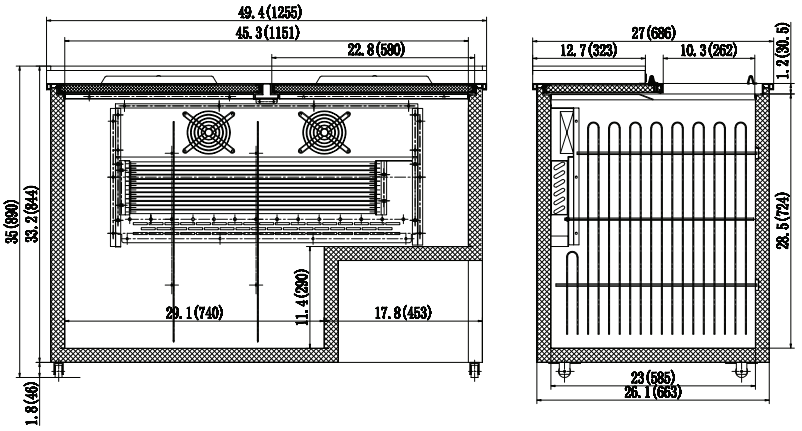

IBC-65SS

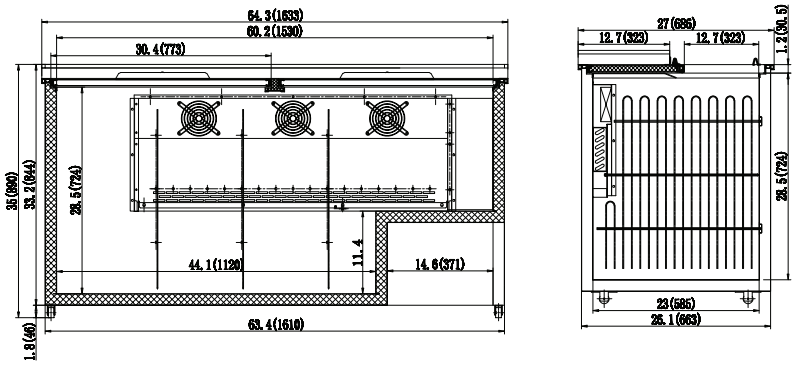
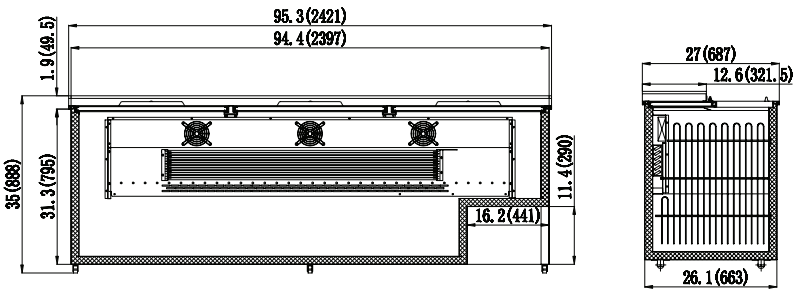
IBC-95SS